

# LCD Monitor Series

---

19.0 TFT Active Matrix LCD Panel  
194X Series User's Manual

## Table of Content

---

<b>Table of Content</b> .....	<b>2</b>
<b>Safety Instructions</b> .....	<b>3</b>
<b>View of Monitor</b> .....	<b>4</b>
<b>Unpacking</b> .....	<b>6</b>
<b>Warning</b> .....	<b>6</b>
<b>Cleaning Notes</b> .....	<b>7</b>
<b>Precaution</b> .....	<b>7</b>
<b>Features</b> .....	<b>7</b>
<b>Hardware Installation</b> .....	<b>8</b>
<b>Hardware Installation Step by Step</b> .....	<b>9</b>
<b>How to Remove Quick-Stand of Monitor</b> .....	<b>10</b>
<b>Monitor Setup Button</b> .....	<b>11</b>
<b>Troubleshooting</b> .....	<b>12</b>
<b>OSD (On-Screen Display) Menu (PC Mode)</b> .....	<b>12</b>
<b>Display Mode</b> .....	<b>19</b>
<b>Specification</b> .....	<b>20</b>


# Safety Instructions

---


1. Please read these safety instructions carefully.
2. Please keep this User's Manual for later reference.
3. Please disconnect this equipment from connector before cleaning. Don't use liquid or sprayed detergent for cleaning. Use moisture sheet or cloth for cleaning.
4. Make sure the voltage of the power source when you try to connect the equipment to the power outlet.
5. All cautions and warnings on the equipment should be noted.
6. Never pour any liquid into opening, this could cause fire or electrical shock.
7. Never open the equipment. For safety reason, the equipment should only be opened by qualified service personnel.
8. If one of the following situations arises, get the equipment checked by a service personnel :
  - a. Liquid has penetrated into the equipment.
  - b. The equipment has been exposed to moisture.
  - c. The equipment has not work well or you can not get it work according to user's manual.
  - d. The equipment has dropped and damaged.
  - d. If the equipment has obvious sign of breakage.
9. **DO NOT LEAVE THIS EQUIPMENT IN AN ENVIRONMENT UNCONDITIONED, STORAGE TEMPERATURE ABOVE 40°C, IT MAY DAMAGE THE EQUIPMENT.**

## View of Monitor

---

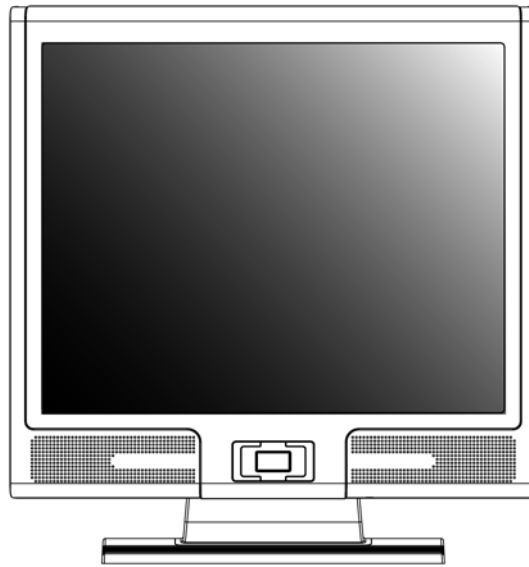


Front View Type 1 (1)

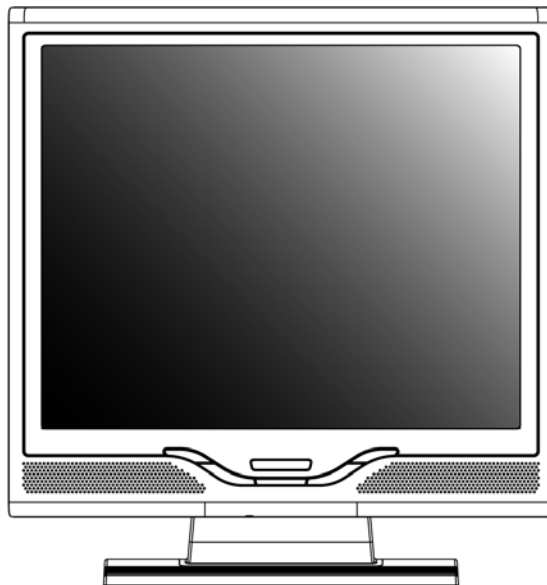


Front View Type 2 (2)

## View of Monitor

---

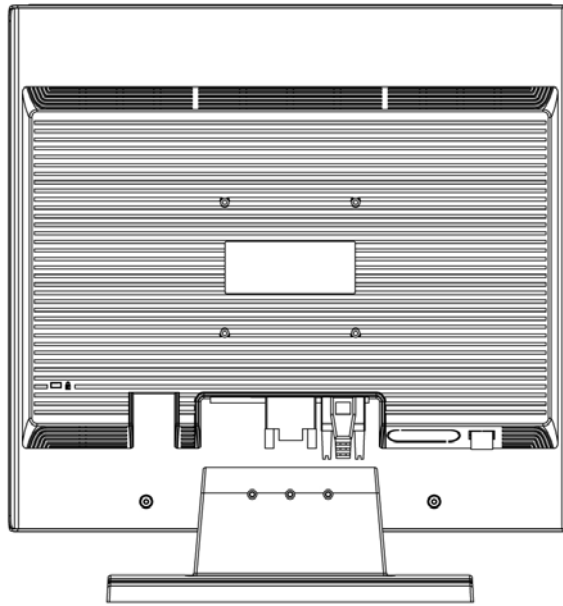




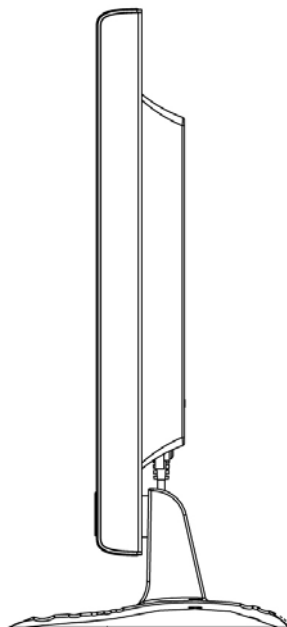



Back View (3)



Side View (4)
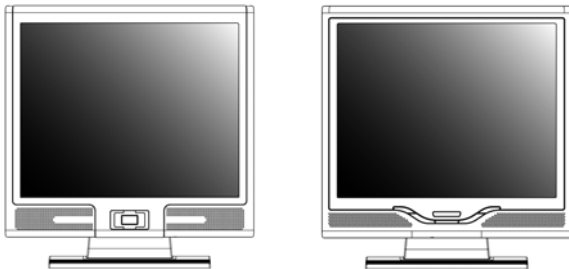
## Unpacking

Thank you for your purchase. Please first check the following package content of the 19" LCD monitor. Contact your dealer or store where you purchased the LCD monitor if anything is missing.

<b>19" TFT LCD Monitor</b>			
<b>External Univ15 pin D-sub (RGB Analog) input signal cable</b>		<b>Power Cord</b>	
<b>Audio Cable with Stereo Phone Jack</b>		<b>Quick Start Guide</b>	
<b>CD User's Manual</b>		<b>Quick Stand</b>	

## Warning

1. Make sure that the system power is turned off.
2. Plug the signal cable to the signal connector at the rear of PC.
3. Plug power cord to the jack at the rear of LCD monitor.
4. Turn on the computer and the monitor.
5. For the best display quality, we suggest that you set the resolution as shown page 19 (Display Mode).

## Cleaning Notes

---

1. Be gentle to clean the screen.
2. Never use any kind of corrosiveness chemical dissolvent to clean the screen, it may hurt your screen surface.
3. We suggest that a camel hair brush or a soft, lint-free cloth be used to clean the screen.
4. Don't exert any pressure directly to the LCD screen.

## Precaution

---

1. Do not expose the monitor to direct sunlight or heat.
2. Do not spill liquid on the monitor.
3. Do not attempt to open the monitor. You may be hurt by electric shock. For service, call your place of purchase.
4. Do not use your monitor when magnets or electronic products are operating nearby.
5. Do not use harsh chemicals or strong cleaning solvents to clean the monitor screen. Wipe it with clean, soft clothes applied with mild solution.
6. Do not place anything on your monitor. Bad ventilation may elevate temperature in the monitor.
7. Don't use your fingers to touch the LCD screen, directly. Fingerprint contains oil and may be difficult to clean.

## Features

---

### **Power Saving:**

The power management complies with VESA DPMS standard. When the system is idle (Off Mode), the monitor automatically cut its power consumption to a level less than 5w.

### **Auto Adjustment Key Function:**

With "AUTO" key, you can automatically adjust the display for your best view.

### **Wide Viewing Angle:**

The horizontal 160° and vertical 150° offer you great screen view.

### **Plug and play compatibility:**

With DDC1/DDC2B compliance, the monitor is plug and plays compatible to Windows 95/98/me/2000/XP.

### **Space Saving:**

The monitor is designed with 220 mm in-depth to provide you with more hand room for desk working space.


### **Side-by-Side :**

The monitor comes with 26.59 mm trimmed down frame to offer side-by-side operation

## Hardware Installation

Be careful to your LCD monitor. It's very delicate and easy to break. Turn off LCD's and PC's power before installation. Follow the installation step by step described below.

### Input

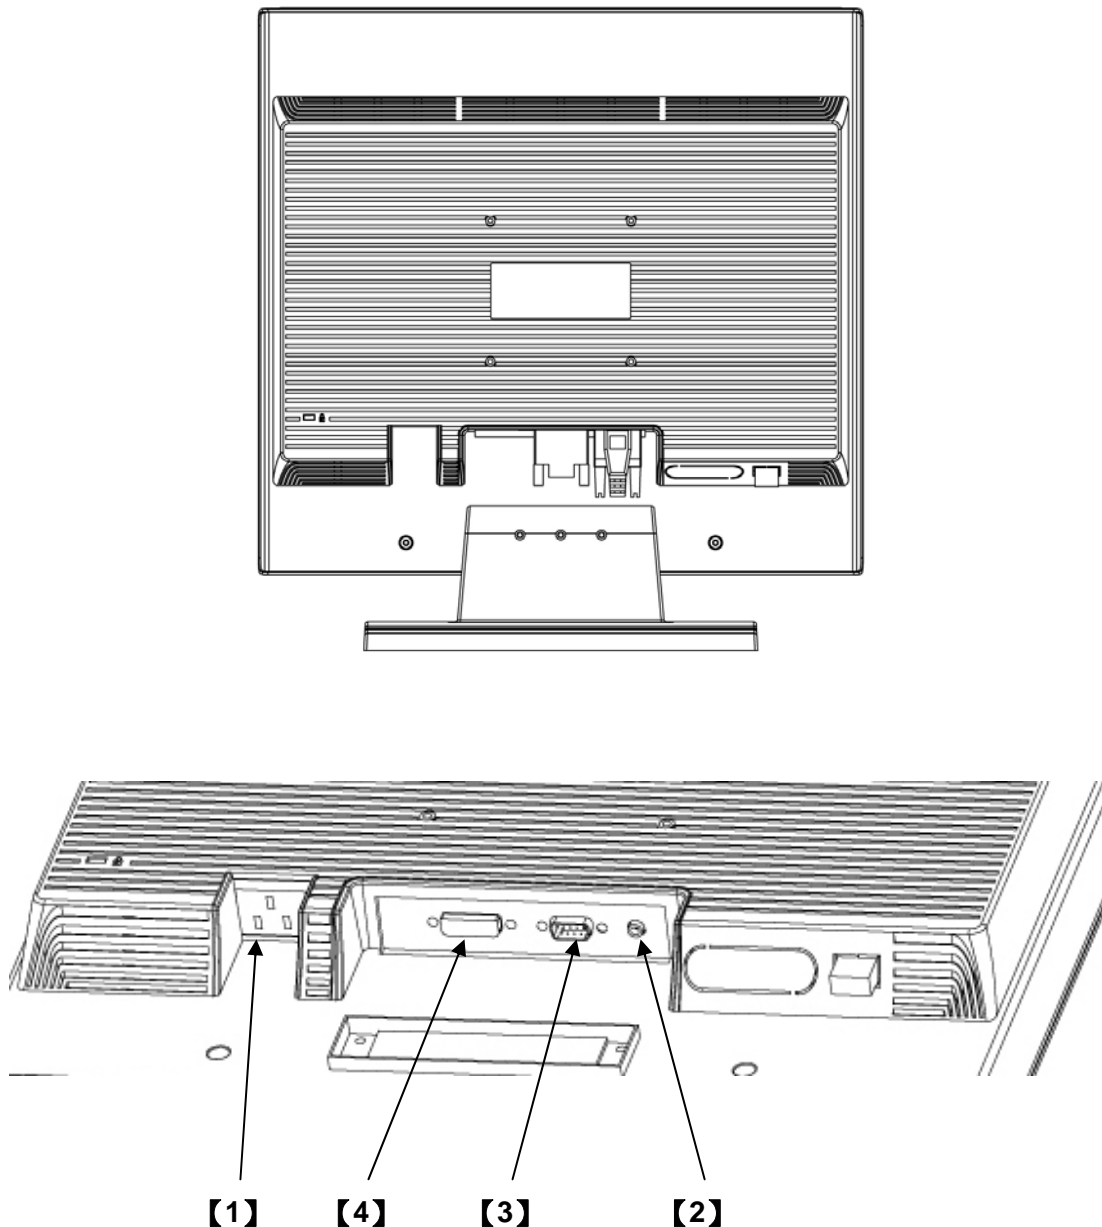

**【1】 DC-IN :** This is for connecting the power cable

**【2】 AUDIO-IN :** This can be connected to the audio-out connector of any sound resource.


**【3】 VGA-IN :** This can be connected with the D-Sub 15 pin signal cable.

**【4】 DVI-I input :** This is the connector for digital video signal inputs (option)




## Hardware Installation Step by Step


1. Get ready with your Quick-Stand and hold your monitor firmly but gentle with your hands and let the panel facing you to pedestal the monitor on the Quick-stand. When you hear the “Click” that means you have set up your monitor in the first place successfully.

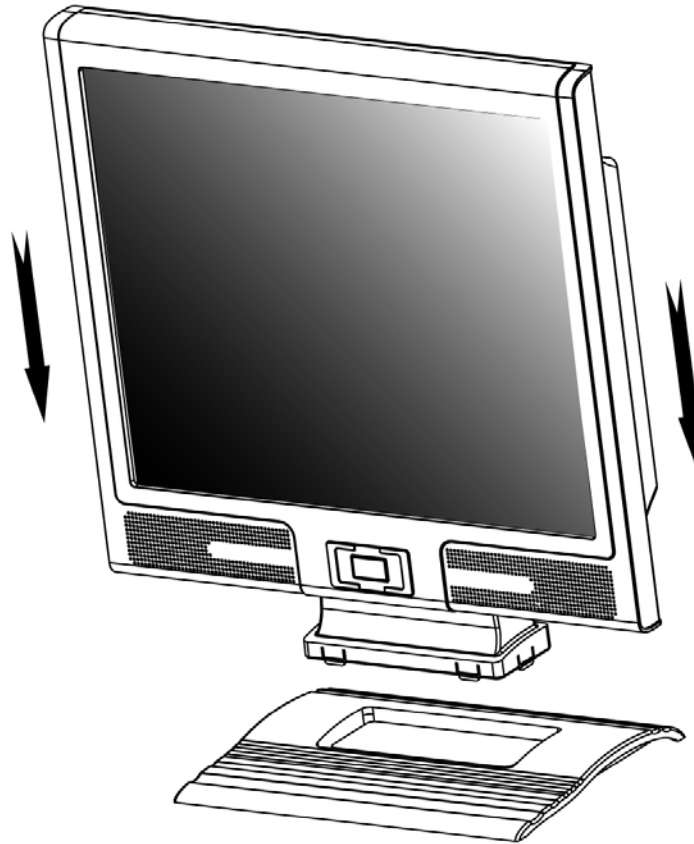

2. Turn your monitor upside down carefully with panel facing you to locate all connector port.

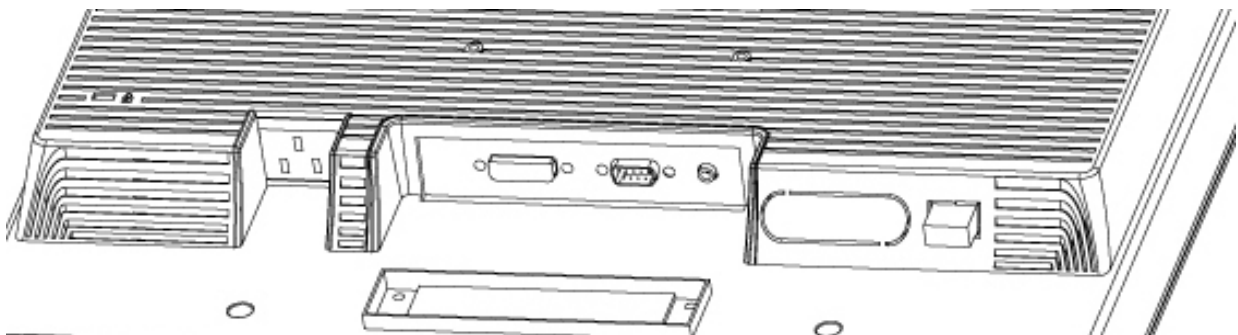


3. Plug in signal cable to VGA-IN of the monitor and the other side of the cable to the computer.

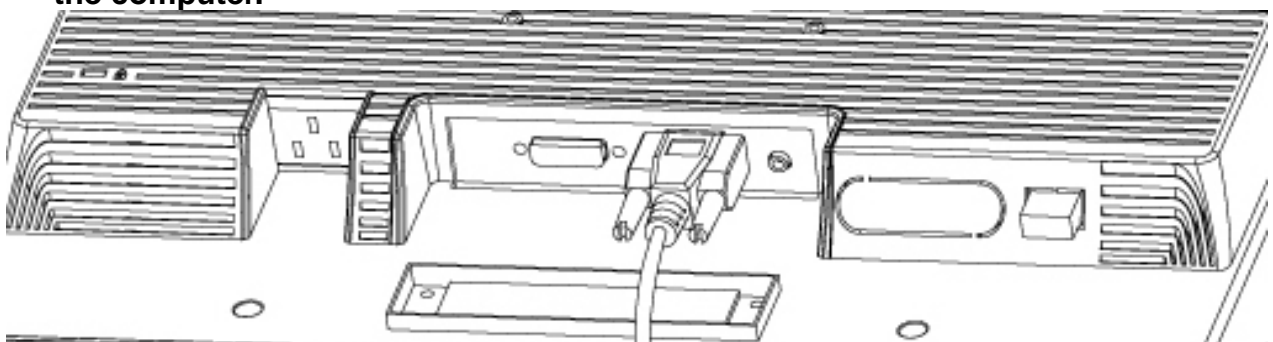


## Hardware Installation Step by Step

4. Connect the audio cable to AUDIO-IN on the monitor, and the other side to computer line out.

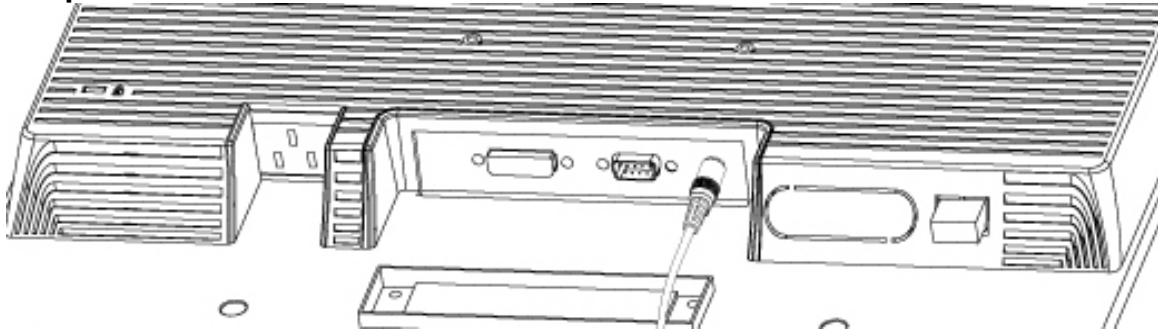


5. Plug power cord onto the Power jack of the monitor.

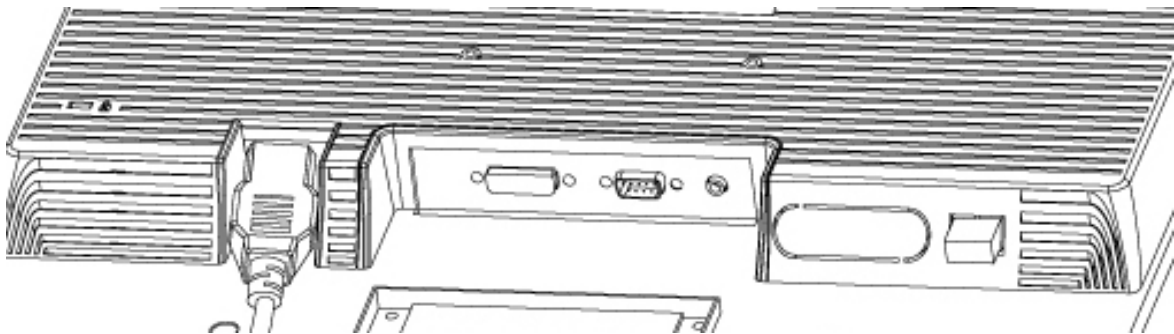

6. Congratulations! You have just completed the hardware installation.


## How to Remove Quick-Stand of Monitor

Remove Quick-Stand of the monitor by unlocking the six hooks as the illustration shows below when you need to deliver the monitor for any reason.

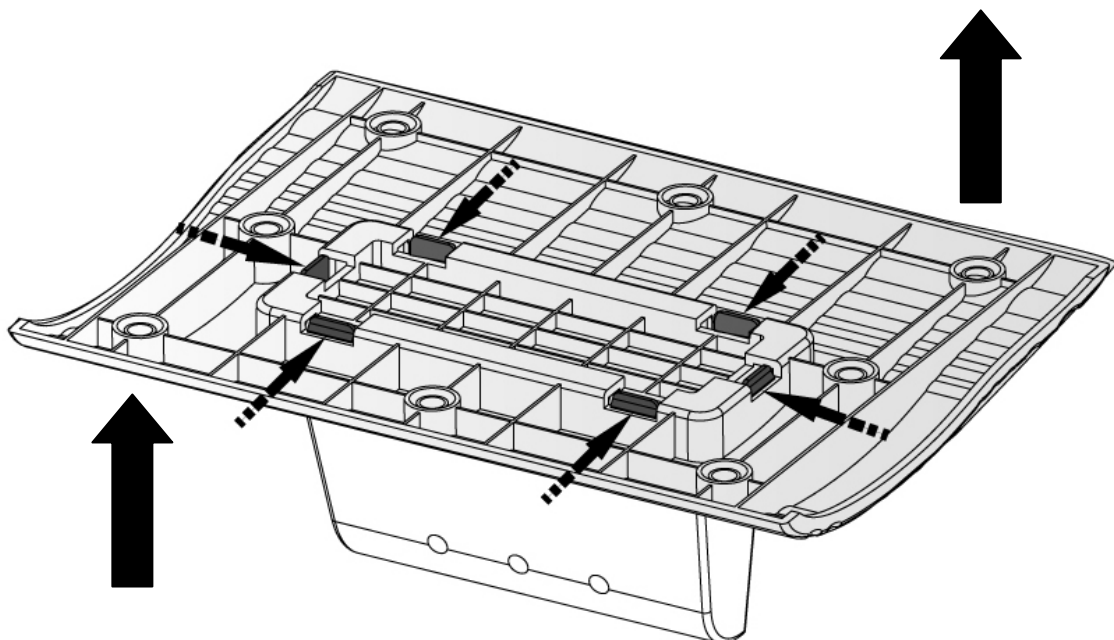

## Monitor Setup Button

Menu control button

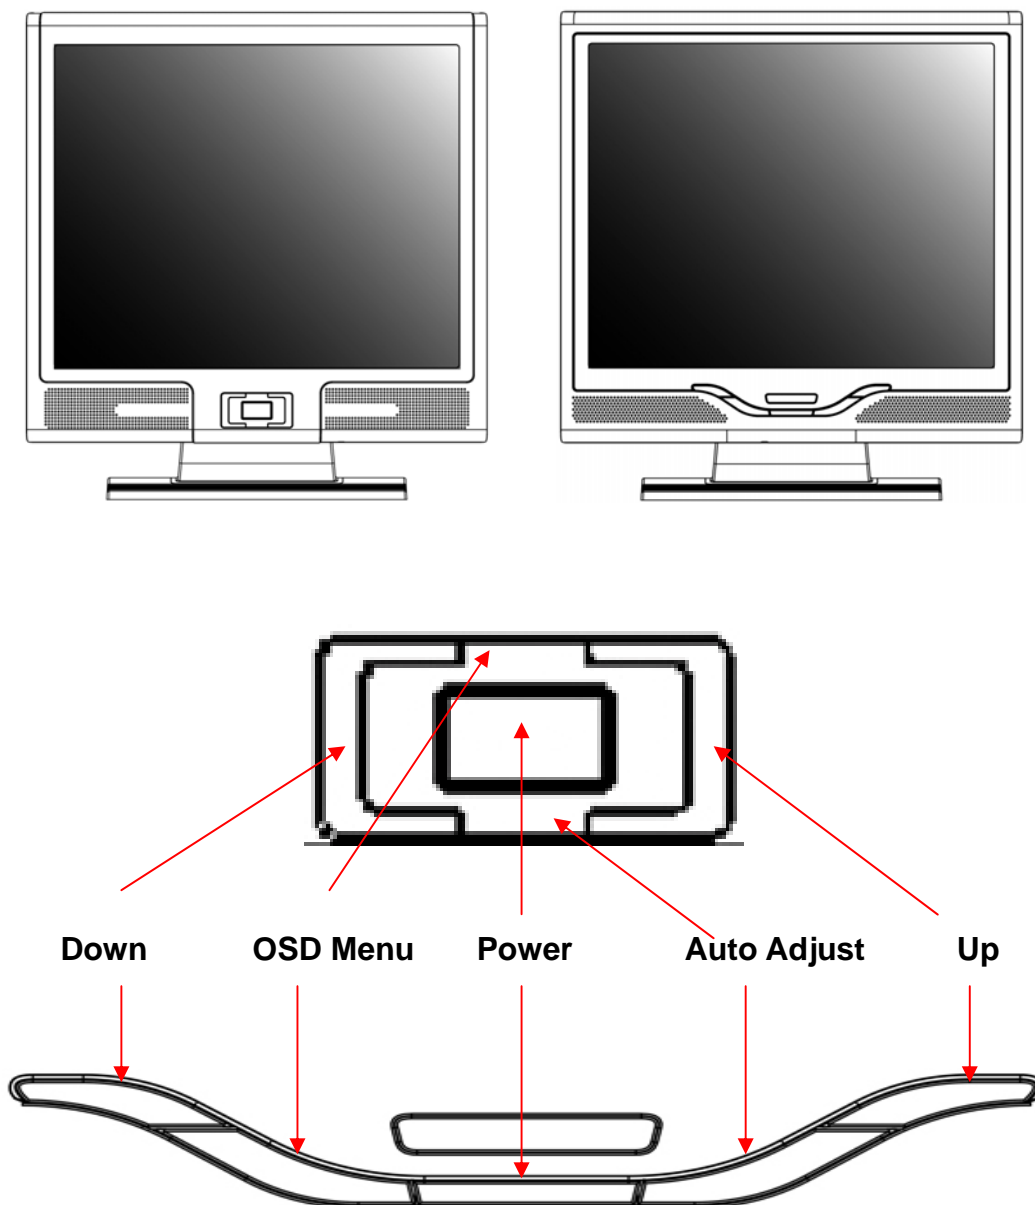

There 5 keys for user to set up the monitor, including “Power”, “MENU “, “AUTO”, ” <-> Down”, ” <+> Up”. Please refer to the introduction below.

1. “Power”: Turn the LCD power on and off. When the power is on, the light turns green, and standby in the color of orange.
2. “AUTO”: Exit and save the setting. Hot key for auto adjustment.
3. “MENU”: Press the button to display OSD main menu and select OSD Option.
4. “ Up”: Increase the value in the OSD option. Hot key for PC / Video / S-Video / TV mode. You can use the button to switch between PC, Video, S-Video, and TV mode screen.
5. “ Down”: Decrease the value in the OSD option . Hot key for volume adjustment.

## Troubleshooting

If you encounter any trouble in using the monitor, make sure your monitor is properly installed according to the following steps before you call for service.

- There is no picture on the screen.

Check:

1. Power saving mode. Press any key and move the mouse to deactivate the mode.
2. Signal Cable Connector Pins. If there are bent or missing pins, consult your dealer or store where you purchased the monitor.

- Characters look too dark or too bright

Check:

1. Using OSD Menu to adjust the Contrast.

- When shall your monitor be adjusted?

Check:

1. After "reset"
2. If the resolution of frequency is being changed.

- The text on the screen is unclear.

Check

1. Make sure the resolution matches with the display mode.

## OSD (On-Screen Display) Menu (PC Mode)

### Option select

1. Press the MENU button to access menu.
  2. Using MENU again for advanced adjustment selection.
  3. Press Down and Up for choosing different OSD function.
- Press MENU as enter to select the function you want.



Main Menu Setting




Main Menu Setting



Contrast :

Adjust the contrast ratio of the display.

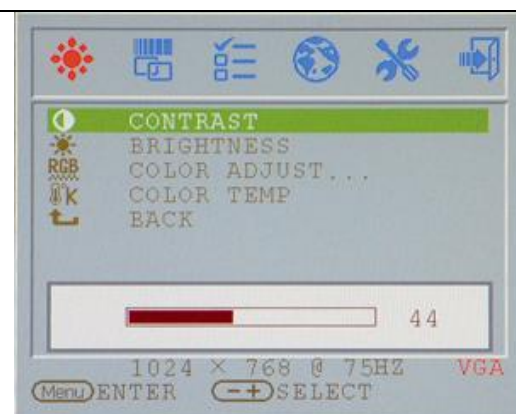

CONTRAST

## OSD (On-Screen Display) Menu Mode (PC Mode)



### BRIGHTNESS:

Adjust the difference between light and dark area.




### BRIGHTNESS



### COLOR ADJUST:

Adjust the RED, GREEN, and BLUE colors of the display. Click "ENTER" to adjust the R.G.B. color separately.

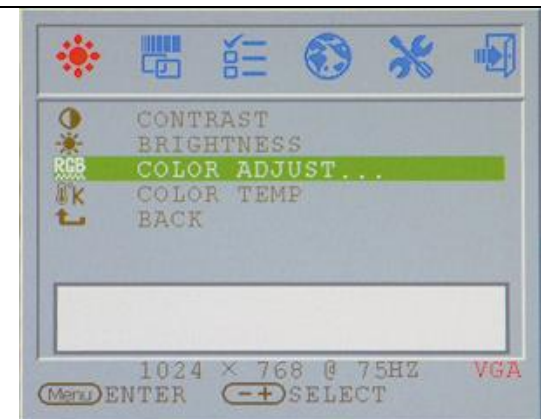


### COLOR ADJUST



### RED:

Adjust the RED color of the display.

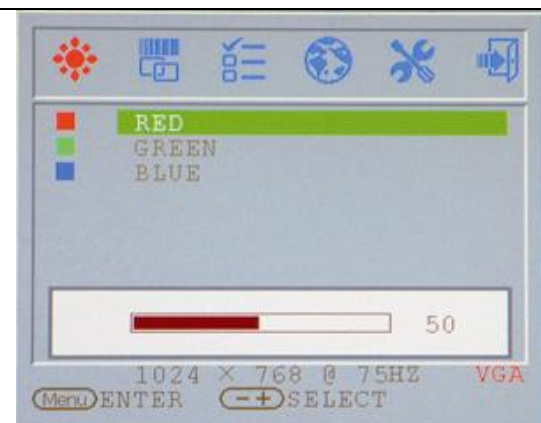

### RED



### BLUE:

Adjust the BLUE color of the display.



### BLUE

## OSD (On-Screen Display) Menu Mode (PC Mode)



**COLOR TEMP:**  
Adjust the color temperature of the display.



COLOR TEMP




**BACK :**  
Return to the Main Menu Screen



BACK



**COLOCK:**  
Adjust the re-flash ratio of the vertical scanning area.

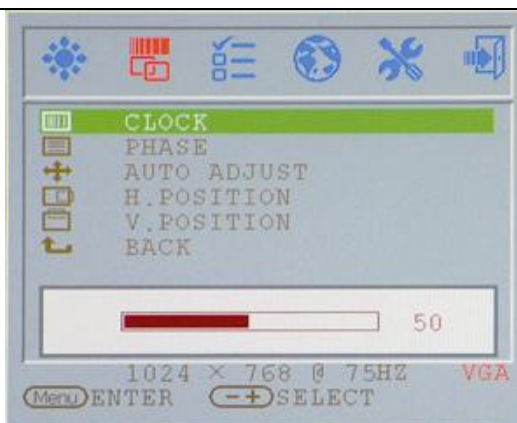

CLOCK



**PHASE:**  
Adjust the re-flash ratio of the horizontal scanning area.



PHASE




## OSD (On-Screen Display) Menu Mode (PC Mode)



### AUTO ADJUST:

Automatically adjust the re-flash ratio of both vertical and horizontal scanning areas of the display.

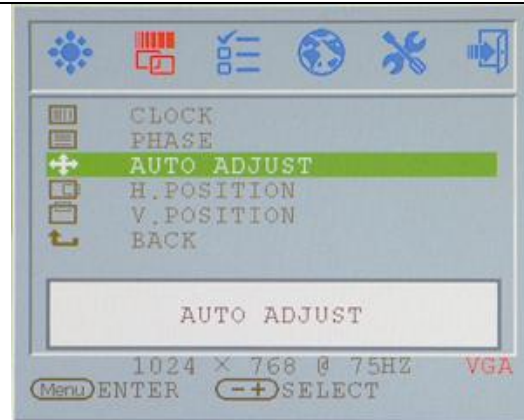


### AUTO ADJUST



### H. POSITION:

Adjust the horizontal viewing area of the display.

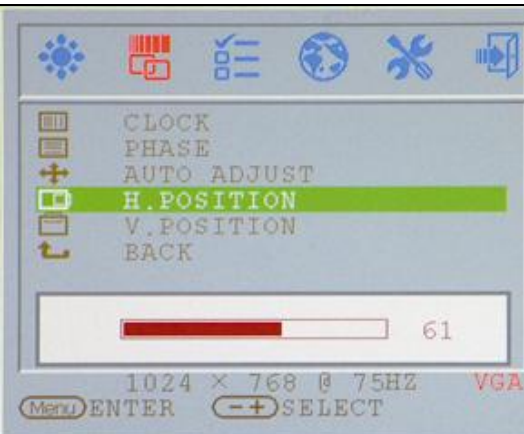


### H. POSITION



### V. POSITION:

Adjust the Vertical viewing area of the display.

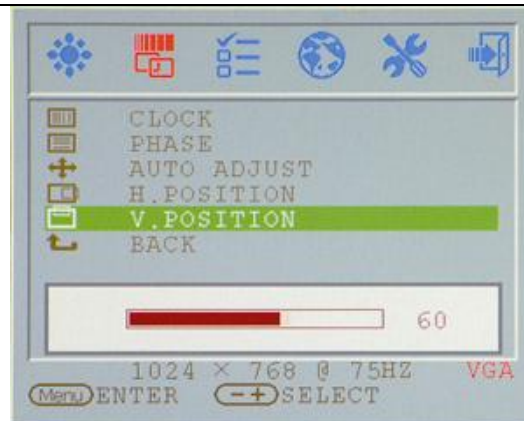


### V. POSITION



### BACK :

Return to the Main Menu Screen

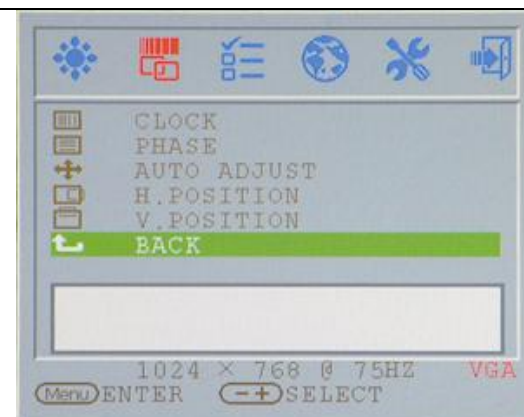

### BACK

## OSD (On-Screen Display) Menu Mode (PC Mode)



### OSD H. POS:

Adjust the Horizontal position of the OSD.



### OSD H. POS



### OSD V. POS:

Adjust the Vertical position of the OSD.



### OSD V. POS



### OSD TIME:

Adjust the displaying time of the OSD.




### OSD TIME



### OSD COLOR:


Change the displaying color of the OSD.

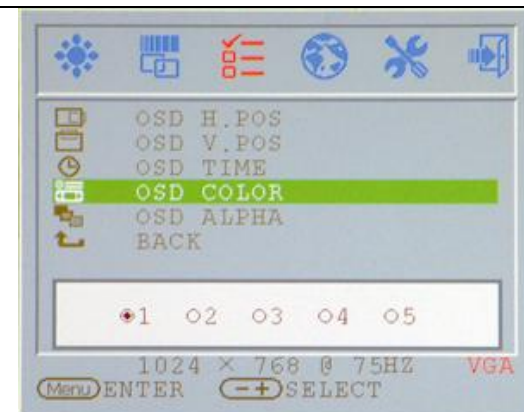


### OSD COLOR



## OSD (On-Screen Display) Menu Mode (PC Mode)



**OSD ALPHA:**  
Adjust the Alpha volume of the OSD displaying.

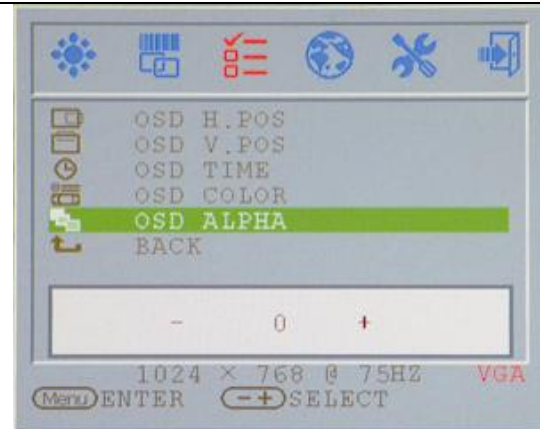

OSD ALPHA



**BACK:**  
Return to the Main Menu Screen.



BACK



**LANGUAGE:**  
Change the language support to the language displaying of the OSD.



LANGUAGE



**RESET:**  
Reload the factory default setting of the display.




RESET

## OSD (On-Screen Display) Menu Mode (PC Mode)



### VOLUME:

Adjust the sound volume of the embedded speaker of the display.

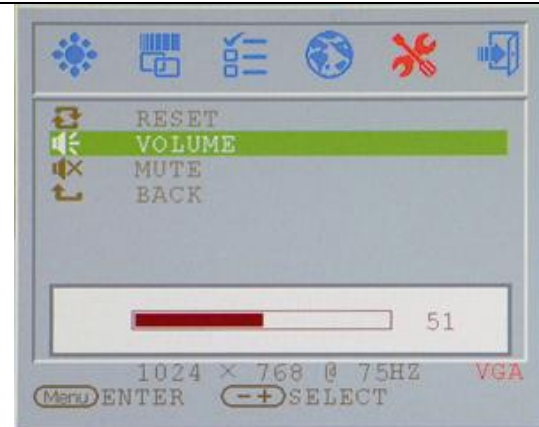

VOLUME



### MUTE:

Silence the embedded speaker of the display.




MUTE



### BACK :

Return to the Main Menu Screen

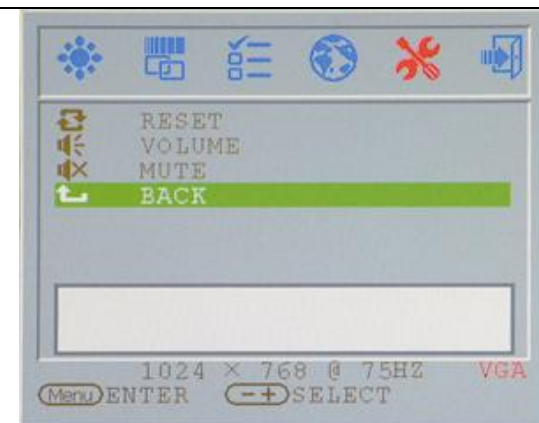

BACK



### VGA / DVI:

Switch to the VGA / DVI Signal inputs of the display.



VGA / DVI

## Display Mode

Incoming Display Mode		
Resolution	Horizontal Frequency (KHz)	Vertical Frequency (Hz)
720X400 (50Hz)	31.5KHz	50.0Hz
720X400 (60Hz)	31.5KHz	59.9Hz
720X400 (70Hz)	31.5KHz	70.1Hz
640X480 (50Hz)	31.5KHz	50.0Hz
640X480 (60Hz)	31.5KHz	59.9Hz
640X480 (66Hz)	35.0KHz	66.7Hz
640X480 (72Hz)	37.9KHz	72.8Hz
640X480 (75Hz)	37.5KHz	75.0Hz
800X600 (50Hz)	35.2KHz	56.3Hz
800X600 (60Hz)	37.9KHz	60.3Hz
800X600 (72Hz)	48.1KHz	72.2Hz
800X600 (75Hz)	46.9KHz	75.0Hz
832X624 (75Hz)	49.7KHz	75.0Hz
1024X768 (60Hz)	48.3KHz	60.0Hz
1024X768 (70Hz)	56.5KHz	70.1Hz
1024X768 (72Hz)	57.7KHz	72.1Hz
1024X768 (75Hz)	60.0KHz	75.0Hz
1152X864 (75Hz)	67.5KHz	75.0Hz
1280X960 (60Hz)	60.0KHz	60.0Hz
1280X1024 (60Hz)	64.0KHz	60.0Hz
1280X1024 (75Hz)	80.0KHz	75.0Hz

1. We offer you 21 Windows compatible modes.
2. If any interference occurs on your screen while you modulating your PC or OSD. It is normal.
3. To obtain best display quality, remember to upgrade your video card driver. We strongly recommended you choose a mode listed in the above-mentioned table.
4. The modes not listed on the table above may be supported.
5. You may use the power management on your computer. It's good for extending the service life of the product.

## Specification

<b>LCD Panel</b>	<b>Type</b> <b>Viewing Angle</b> <b>Contrast Ratio</b> <b>Brightness</b> <b>Response Time</b> <b>Display Colors</b> <b>Max Resolution</b> <b>Pixel Pitch</b>	<b>19.0" TFT Active Matrix LCD Display</b> <b>H:160° , V:150°</b> <b>700:1(MAX) , 500 : 1(Typical)</b> <b>250 cd/m<sup>2</sup>(Typical)</b> <b>8 ms(Typical)</b> <b>16.7M colors</b> <b>1280X1024(SXGA) @75Hz</b> <b>0.294mm(H)x0.294mm(V)</b>
<b>Input Signals</b>	<b>RGB Analog</b>	<b>VGA Level:0.7Vp-p(75Ω)</b> <b>Frequency FH:30~80KHz / FV:50~75Hz</b>
<b>Compatibility</b>	<b>PC</b>	<b>Up to 1280X1024@75Hz(Non-interlaced)</b>
<b>Connector</b>	<b>RGB Analog</b> <b>Audio IN</b> <b>*DVI-D</b>	<b>D-sub 15-pins</b> <b>Stereo Phone Jack</b> <b>D-sub 24-pin DVI-D connector(optional)</b>
<b>Power</b>	<b>AC input Voltage</b> <b>Consumption</b> <b>Power saving mode</b>	<b>100-240V, 50/60Hz(universal)</b> <b>Active &lt; 48Watt Max</b> <b>Standby &lt; 5Watt</b>
<b>Internal Speaker</b>		<b>3Wx2(Stereo)</b>
<b>User Interface</b>	<b>LED Indicator</b>	<b>Active        - Green        Off   - Turn off</b> <b>Standby      - Orange</b>
<b>Operating Condition</b>	<b>Temperature</b> <b>Air Humidity</b>	<b>0°C~45°C</b> <b>10% ~ 80% R.H.</b>
<b>Dimensions</b>	<b>Physical</b>	<b>460mm(H) x 430mm(W) x 210mm(D)</b>
<b>Net Weight</b>		<b>4.8kg</b>
<b>Gross Weight</b>		<b>5.5kg</b>
<b>DDC</b>		<b>DDC1/DDC2B Compliant</b>
<b>Power Management</b>		<b>VESA DPMS, EPA Energy Star</b>
<b>Regulation (Certifications)</b>		<b>CE, FCC, CB, TUV, UL</b>

**\*Option Function**