


**Specifications**
**Input Data**

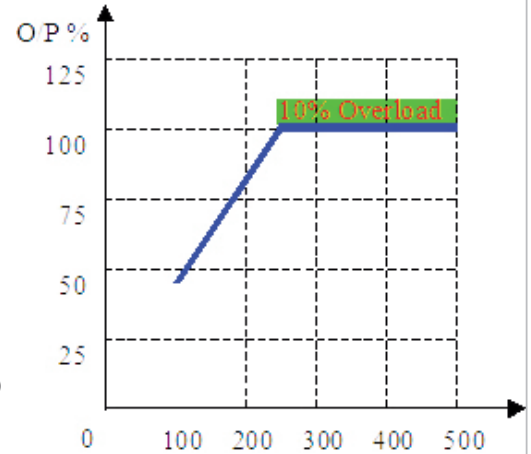
• Maximum input power	3510 W
• Norminal DC voltage	400 V
• Maximum input voltage	500 VDC
• MPPT voltage range	150 V to 500 V ±5 %
• System start-up voltage	100 V ±5 %
• Working voltage range	100 V ±5 % ~ 500 V -5 % +0 % V
• Initial feeding voltage	150 V ±5 %
• Full rating working range	200 V to 500 V
• Max. input current	15.2 ADC
• Shutdown voltage	80 V typical
• DC voltage ripple	< 10%
• DC insulation resistance	> 8M ohm
• DC Switch	On/Off 20A
• DC Connector	Tyco-contact (1-pair)
• Attached DC connector	Tyco-contact (1-pair) cable type

**Output data**

• Nominal output power <sup>1</sup>	3000 W
• Maximum output power <sup>2</sup>	3300 W (limited to 10 mins @50 °C ambient)
• Operational voltage range <sup>3</sup>	198 V (min), 256 V (max)
• Operational normal voltage	230 Vac
• Operational frequency range <sup>4</sup>	50 Hz
	47.5 < f50 < 50.2 for 50 Hz
• Nominal output current	13.1 A
• O/P current distortion <sup>5</sup>	THD < 5%, each harmonics < 3%
• Power factor	> 0.99
• DC current injection	< 0.5% of rated inverter output current

**General Data**

• Internal power consumption	< 7 W
• Standby power (at night)	< 0.1 W
• Minimum conversion efficiency	> 90 %, under input voltage > 210 V, load >20 %
• Maximum conversion efficiency (DC/AC) <sup>6</sup>	> 95 %
• European efficiency	> 94 %
• GFCI threshold <sup>7</sup>	See ground fault current detection
• Ground current detection range	0 ~ 500 mA
• Ground current detection frequency	0 ~ 700 Hz
• Protection degree	IP65
• Operation temperature	-25 °C to 55 °C
• Humidity	0 to 95 %, non-condensing
• Heat dissipation	Convection
• Acoustic noise level	< 40 dB, A-weighted, frequency up to 20 kHz
• Altitude	Up to 3000 m without power derating 5 °C derated for each additional 500 m
• Dimension (mm)	352 x 300 x 143 (product) / 460 x 460 x 265 (packaging)
• Weight (net/gross)	14 kg (product) / 16 kg (packaging)

**\*Load Curve**


The relation of input DC voltage and output power is shown in figure. Once input V is less than 250V, the relation of I/P V and load % is :  
Load% = 0.4 x V

1. Based on the output voltage is higher than 200Vac
2. According to DK5940 requirement
3. VDE0126-1-1, it is -20%/+15%
4. Based on the limit of VDE0126-1-1
5. Under utility voltage THD<3%, reference IEEE1547, EN61000-3-2
6. Under input voltage>=400V, full rated output power, 25°C ambient
7. According to VDE0126-1-1 requirement

**Warranty Notice:** 5 year on materials

**EAN :** TBA

**Yuraku Pte Ltd**

40 Ubi Crescent,  
#01-02 Ubi Techpark, Singapore 408 567  
Tel: +65 6238 2158  
Fax: +65 6238 0076  
Website: www.yuraku.com.sg

**Yuraku S.r.l.**

Via Fratelli Rosselli 3/2  
20019 Settimo Milanese (Milano) Italy  
Tel: +39 02 3351 4444  
Fax: +39 02 3359 0580  
Website: www.yuraku.it

**Yuraku, SL**

C/Florida Nº 1 (nave 4) Pol. Ind. Villapark  
28670 Villaviciosa de Odón (Madrid) España  
Tel: +34 91 6657 423  
Fax: +34 91 6166 324  
Website: www.yuraku.es

**create >> excite >> inspire**

Terms and Specifications are subjected to change without notice.  
©2010 YURAKU PTE LTD