


Specifications
Input Data

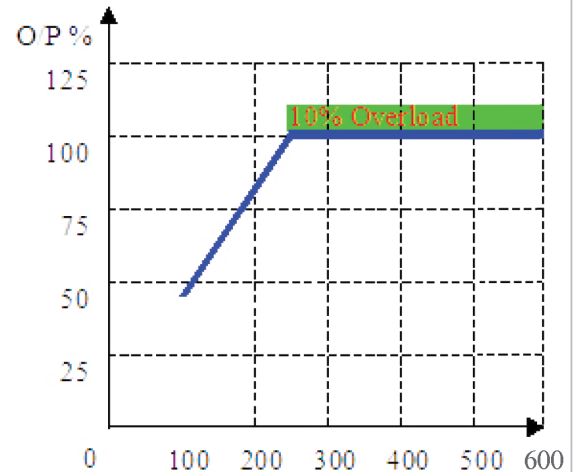
• Maximum input power	6500 W
• Norminal DC voltage	400 V
• Maximum input voltage	600 VDC
• MPPT voltage range	150 V to 600 V ±5 %
• System start-up voltage	100 V ±5 %
• Working voltage range	100 V ±5 % ~ 600 V -5 % +0 % V
• Initial feeding voltage	150 V ±5 %
• Full rating working range	250 V to 600 V
• Max. input current	30 ADC
• Shutdown voltage	80 V typical
• DC voltage ripple	< 10%
• DC insulation resistance	> 8M ohm
• DC Switch	On/Off 30 A
• DC Connector	Tyco-contact (3-pair)
• Attached DC connector	Tyco-contact (1-pair) cable type

Output data

• Nominal output power	6000 W
• Maximum output power	6000 W
• Operational voltage range ¹	198 V (min), 256 V (max)
• Operational normal voltage	230 Vac
• Operational frequency range ²	50 Hz
	47.5 < f50 < 50.2 for 50 Hz
• Nominal output current	26.1 A
• O/P current distortion ³	THD < 5%, each harmonics < 3%
• Power factor	> 0.99
• DC current injection	< 0.5% of rated inverter output current

General Data

• Internal power consumption	< 10 W
• Standby power (at night)	< 0.1 W
• Minimum conversion efficiency	> 90 %, under input voltage > 210 V, load >20 %
• Maximum conversion efficiency (DC/AC) ⁴	> 96 %
• European efficiency	> 95 %
• GFCI threshold ⁵	See ground fault current detection
• Ground current detection range	0 ~ 500 mA
• Ground current detection frequency	0 ~ 700 Hz
• Protection degree	IP65
• Operation temperature	-25 °C to 55 °C
• Humidity	0 to 95 %, non-condensing
• Heat dissipation	Convection
• Acoustic noise level	< 40 dB, A-weighted, frequency up to 20 kHz
• Altitude	Up to 3000 m without power derating 5 °C derated for each additional 500 m
• Dimension (mm)	550 x 420 x 143 (product) / 660 x 580 x 265 (packaging)
• Weight (net/gross)	27 kg (product) / 31 kg (packaging)

***Load Curve**


The relation of input DC voltage and output power is shown in figure.
 Once input V is less than 250V, the relation of I/P V and load % is :
 Load% = 0.4 x Vi

1. VDE0126-1-1, it is -20%/+15%
2. According to DK5940 requirement
3. Under utility voltage THD<3%, reference IEEE1547, EN61000-3-2
4. Under input voltage ≥ 400V, full rated output power, 25°C ambient
5. According to VDE0126-1-1 requirement

Warranty Notice: 5 year on materials

EAN: TBA

Yuraku Pte Ltd

40 Ubi Crescent,
 #01-02 Ubi Techpark, Singapore 408 567
 Tel: +65 6238 2158
 Fax: +65 6238 0076
 Website: www.yuraku.com.sg

Yuraku S.r.l

Via Fratelli Rosselli 3/2
 20019 Settimo Milanese (Milano) Italy
 Tel: +39 02 3351 4444
 Fax: +39 02 3359 0580
 Website: www.yuraku.it

Yuraku, SL

C/Florida Nº 1 (nave 4) Pol. Ind. Villapark
 28670 Villaviciosa de Odón (Madrid) España
 Tel: +34 91 6657 423
 Fax: +34 91 6166 324
 Website: www.yuraku.es

create >> excite >> inspire

Terms and Specifications are subjected to change without notice.
 ©2010 YURAKU PTE LTD